

# ENGINE GOVERNING SYSTEM

## ESD5500E Series Speed Control Unit



- Simple Installation and Adjustability
- Environmentally Friendly
- Adjustable Droop and Idle Circuits

- Accessory Inputs for Load Sharing
- Variable Speed Operation
- Reverse Battery Voltage Protected

### INTRODUCTION

The ESD5500E Series speed control unit is an all electronic device designed to control engine speed with fast and precise response to transient load changes. This closed loop control, when connected to a proportional electric actuator and supplied with a magnetic speed sensor signal, will control a wide variety of engines in an isochronous or droop mode. It is designed for high reliability and built ruggedly to withstand the engine environment.

Simplicity of installation and adjustment was foremost in the design. Non interacting performance controls allow near optimum response to be easily obtained.

The primary features of the ESD5500E Series speed control unit are the engine STARTING FUEL and SPEED RAMPING adjustments. The use of these features will minimize engine exhaust smoke experienced prior to attaining engine operating speed.


Other features include adjustable droop and idle operation, inputs for accessories used in multi engine or special applications, protection against reverse battery voltage, transient voltages, accidental short circuit of the actuator and fail safe design in the event of loss of speed sensor signal or battery supply.

The ESD5500E Series speed control unit is compatible with all GAC proportional actuators except the ACB2000 electric actuator. When the ESD5500E Series speed control unit is used with a ADC100 Series electric actuator, the DROOP adjustment range will be less due to this actuator's low current demand.

### DESCRIPTION

Engine speed information for the speed control unit is usually received from a magnetic speed sensor. Any other signal generating device may be used provided the generated frequency is proportional to engine speed and meets the voltage input and frequency range specification. The speed sensor is typically mounted in close proximity to an engine driven ferrous gear, usually the engine ring gear. As the teeth of the gear pass the magnetic sensor, a signal is generated which is proportional to engine speed.

Signal strength must be within the range of the input amplifier. An amplitude of 0.5 to 120 volts RMS is required to allow the unit to function within its design specifications. The

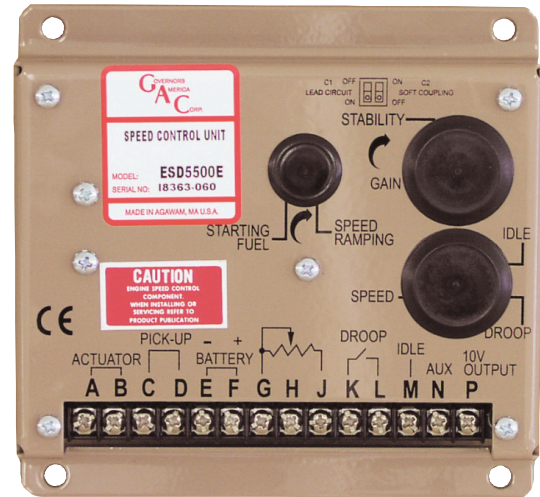

speed signal is applied to Terminals C and D of the speed control unit. Between these terminals there is an input impedance of over 33,000 ohms. Terminal D is internally connected to Terminal E, battery negative. Only one end of the shielded cable should be connected.

When a speed sensor signal is received by the controller, the signal is amplified and shaped by an internal circuit to provide an analog speed signal. If the speed sensor monitor does not detect a speed sensor signal, the output circuit of the speed control unit will turn off all current to the actuator. A summing circuit receives the speed sensor signal along with the speed adjust set point input. The speed range has a ratio of 8:1 and is adjusted with a 25 turn potentiometer. The output from the summing circuit is the input to the dynamic control section of the speed control unit. The dynamic control circuit, of which the gain and stability adjustments are part, has a control function that will provide isochronous and stable performance for most engine types and fuel systems.

The speed control unit circuit is influenced by the gain and stability performance adjustments. The governor system sensitivity is increased with clockwise rotation of the gain adjustment. The gain adjustment has a range of 33:1. The stability adjustment, when advanced clockwise, increases the time rate of response of the governor system to match the various time constants of a wide variety of engines. The speed control unit is a P I D device, the "D", derivative portion can be varied when required.




Governors America Corp., 720 Silver Street Agawam, MA 01001  
phone: 413.786.5600 fax: 413.789.7736  
www.governors-america.com  
info@governors-america.com



During the engine cranking cycle, STARTING FUEL can be adjusted from an almost closed, to a nearly full fuel position. Once the engine has started, the speed control point is determined, first by the IDLE speed set point and the SPEED RAMPING circuit. After engine speed ramping has been completed, the engine will be at its governed operating speed. At the desired governed engine speed, the actuator will be energized with sufficient current to maintain the desired engine speed, independent of load (isochronous operation).

**DIAGRAM 1 SYSTEM WIRING DIAGRAM AND OUTLINE**

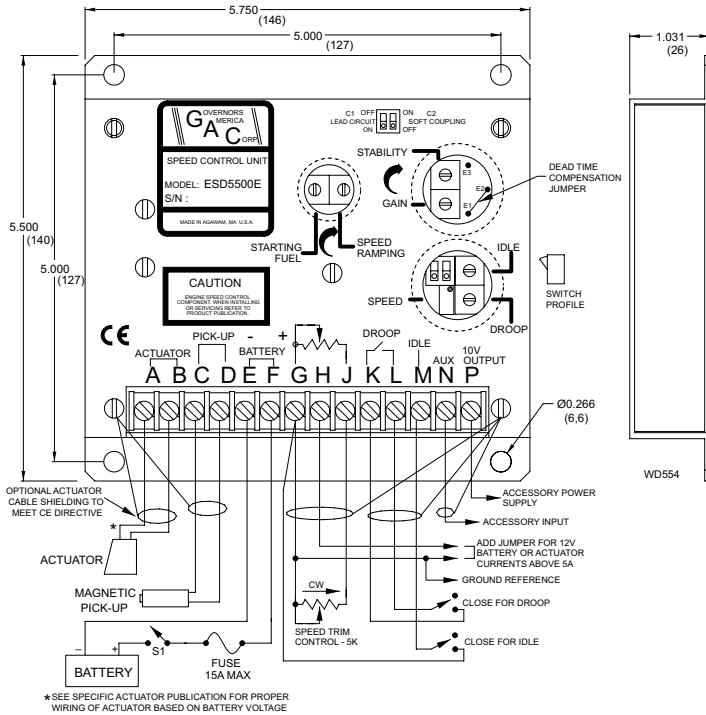

The output circuit provides switching current at a frequency of about 500 Hz. to drive the actuator. Since the switching frequency is well beyond the natural frequency of the actuator, there is no visible motion of the actuator output shaft. Switching the output transistors reduces its internal power dissipation for efficient power control. The output circuit can provide current of up to 10 amps continuous at 25°C for 12 and 24 VDC battery systems. The actuator responds to the average current to position the engine fuel control lever. In standard operation, the speed control unit performance is isochronous. Droop governing can be selected by connecting terminals K and L and the percent of droop governing can be varied with the droop adjustment control. The droop range can be decreased by connecting Terminals G and H.

The speed control unit has several performance and protection features which enhance the governor system. A speed anticipation circuit minimizes speed overshoot on engine startup or when large increments of load are applied to the engine. Engine idle speed can be remotely selected and is adjustable. Accessory inputs to achieve variable speed operation and multi engine control can be accepted by the ESD5500E Series speed control unit from GAC load sharing modules, automatic synchronizers, ramp generators and other accessory engine control modules. Protection against reverse battery voltage and transient voltages is provided. The design is fail safe in the event of loss of speed sensor signal or battery supply.

**SELECTION CHART**

MODEL	CHARACTERISTICS
ESD5500E	Standard Unit
ESD5520E	Light Force
ESD5522E	Enhanced Droop Control
ESD5524E	Use with SLM100
ESD5526E	Use with ATB Application/Anti-Windup Circuit
ESD5528E	Anti-Windup Circuit

**SPECIFICATIONS**

**PERFORMANCE**

- Isochronous Operation..... ±0.25 % or better
- Speed Range/Governor.....1K - 7.5K Hz Continuous
- Speed Drift with Temperature..... ±1% Maximum
- Idle Adjust CW.....60% of Set Speed
- Idle Adjust CCW.....Less than 1200 Hz
- Droop Range.....1-5% Regulation
- Droop Adj. Max. (K-L Jumpered).....400 Hz., ±75 Hz Per 1.0A change
- Droop Adj. Min. (K-L Jumpered).....15 Hz., ±75 Hz Per 1.0A change
- Speed Trim Range.....± 200 Hz
- Remote Variable Speed Range.....500-7.5K Hz or any part thereof
- Terminal Sensitivity
  - J.....100 Hz., ±15 Hz/Volt @ 5.0 K Impedance
  - L.....735 Hz., ±60 Hz/Volt @ 65 K Impedance
  - N.....148 Hz., ±10 Hz/Volt 1 Meg Impedance
  - P.....10 VDC Supply @ 20 mA Max

**ENVIRONMENTAL**

- Ambient Operating Temperature Range.....-40° to +180°F (-40° to +85°C)
- Relative Humidity.....up to 95%
- All Surface Finishes.....Fungus proof and corrosion resistance
- RoHS Regulation.....Compliant

**INPUT POWER**

- DC Supply.....12 or 24 ± 20% VDC Battery Systems  
(Transient and Reverse Voltage Protected)
- Polarity.....Negative Ground (case isolated)
- Power Consumption.....50 Continuous mA plus actuator current
- Speed Signal Range.....0.5-50 VAC
- Actuator Current Range @ 77°F (25°C) - (Inductive Load).....Min. 2.5  
Max 10 Amps Continuous
- Speed Sensor Signal.....0.5-120 Volts RMS

**RELIABILITY**

- Vibration.....1G @ 20-100 Hz
- Testing.....100% Functionally Tested

**PHYSICAL**

- Dimensions.....See DIAGRAM. 1, Wiring Diagram and Outline
- Weight.....1.2 lb. (0.544 kg)
- Mounting.....Any Position, vertical preferred

**COMPLIANCE / STANDARDS**

- Agency.....CE Requirements

This document is subject to change without notice.  
Caution: None of GAC products are flight certified controls including this item.

PTI1002E A